

IPC-HFW5231E-Z12

2MP WDR IR Bullet Network Camera



- 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- H.265&H.264 triple-stream encoding
- 50/60fps@1080(1920×1080)
- Smart Detection supported
- WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 5.3mm ~64mm 12x zoom lens
- 2/1 Alarm in/out, 1/1 audio in/out
- Max. IR LEDs Length 200m
- Micro SD memory, IP67, PoE



System Overview

Eco-savvy products by upgrading H.265 encoding technology, bringing high efficient video compression. It saves bandwidth and storage, energy-saving design to enhance the monitoring system. Meanwhile, the series offers features such as starlight, Smart IR technology, intelligent image analysis techniques. It provides excellent image quality and intelligent and efficient event reminders. This series provides IP67 weatherproof and IK10 vandal-proof protection feature. Give customers more value

Functions

Starlight Technology

Featuring Dahua's Starlight Technology, this camera is ideal for applications with challenging lighting conditions. Its low-light performance delivers usable video with minimal ambient light. Even in extreme low-light conditions, Starlight Technology is capable of delivering color images in near complete darkness (0.006 lux).

Wide Dynamic Range

Embedded with industry leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. For applications with both bright and low lighting conditions that change quickly, True WDR (120dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the camera has the ability to detect and analyze moving objects for improved video surveillance. The camera provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed, ideal for business intelligence, and Facial Detection, for searching or identification of individuals.

Environmental

With a temperature range of -30 °C to +60 °C (-22 °F to +140 °F), the

camera is designed for extreme temperature environments. Subjected and certified to rigorous dust and water immersion tests, the IP67 rating makes it suitable for demanding outdoor applications. For environments with rain, sleet, snow and fog, an integrated wiper provides users with clear visibility at all times.

Protection

Supporting ±30% input voltage tolerance, this camera suits even the most unstable conditions for outdoor applications. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

Smart H.265+

Deliver high quality video without straining the network, Smart H.265+ is the optimized implementation of H.265. The Smart H.265+ encoding technology includes a scene adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction, providing saving of up to 70% of bandwidth and storage when compared with standard H.265.

HEVC (H.265)

H.265 ITU-T VCEG is a new video coding standard. H.265 Following standard developed around the existing video coding standard H.264, some retain the original technology, while some of the relevant technology to improve the new technology uses advanced technology to improve the relationship between the code stream, encoding quality, and the delay between algorithm complexity, optimize settings specific contents include: Improve compression efficiency, improve the robustness and error recovery capabilities, real-time to reduce the delay, reduce channel acquisition time and a random access delay, reduce complexity, etc

Technical Specification						Day/Night	Auto(ICR) / Color / B/W
Camera						BLC Mode	BLC / HLC / WDR(120dB)
Image Sensor	1/2.8" 2Megapixel progressive scan CMOS					White Balance	Auto/Natural/Street Lamp/Outdoor/Manual
Effective Pixels	1920(H) x 1080(V)					Gain Control	Auto/Manual
RAM/ROM	256MB/32MB					Noise Reduction	3D DNR
Scanning System	Progressive					Motion Detetion	Off / On (4 Zone, Rectangle)
Electronic Shutter Speed	Auto/Manual, 1/3(4)~1/100000s					Region of Interest	Off / On (4 Zone)
Minimum Illumination	0.006Lux/F1.4 (Color,1/3s,30IRE) 0.05Lux/F1.4 (Color,1/30s,30IRE) 0Lux/F1.4 (IR on)					Electronic Image Stabilization (EIS)	N/A
S/N Ratio	More than 50dB					Smart IR	Support
IR Distance	Distance up to 200m (656ft)					Defog	N/A
IR On/Off Control	Auto/ Manual					Digital Zoom	16x
IR LEDs	4					Flip	0°/90°/180°/270°
Lens						Mirror	Off / On
Lens Type	Motorized/ Auto Iris(HALL)					Privacy Masking	Off / On (4 Area, Rectangle)
Mount Type	Board-in					Audio	
Focal Length	5.3mm~64mm					Compression	G.711a/ G.711Mu/ AAC/ G.726
Max. Aperture	F1.4					Network	
Angle of View	H: 59°~5°, V:34°~3°					Ethernet	RJ-45 (10/100Base-T)
Optical Zoom	12x					Protocol	HTTP; HTTPS; TCP; ARP; RTSP; RTP; UDP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; QoS; UPnP;NTP; Bonjour; 802.1x; Multicast; ICMP; IGMP; SNMP
Focus Control	Motorized					Interoperability	ONVIF, PSIA, CGI
Close Focus Distance	1.5m(4.9ft)					Streaming Method	Unicast / Multicast
DORI Distance	Lens	Detect	Observe	Recognize	Identify	Max. User Access	10 Users /20 Users
	W	73m(236ft)	29m(95ft)	14m(46ft)	7m(23ft)	Edge Storage	NAS Local PC for instant recording Mirco SD card 128GB
	T	882m(2893ft)	353m(1158ft)	176m(577ft)	88m(288ft)	Web Viewer	IE, Chrome, Firefox, Safari
Pan/Tilt/Rotation						Management Software	Smart PSS, DSS, Easy4ip
Pan/Tilt/Rotation Range	Pan:0°~360°; Tilt:0°~90°; Rotation:0°~360°					Smart Phone	IOS, Android
Intelligence						Certifications	
IVS (optional)	Tripwire, Intrusion, Object Abandoned/Missing					Certifications	CE (EN 60950:2000) UL:UL60950-1 FCC: FCC Part 15 Subpart B
Advanced Intelligent Functions	Face Detection					Interface	
Video						Video Interface	1 Port(For adjustment only)
Compression	H.265+/H.265/H.264+/H.264					Audio Interface	1/1 channel In/Out
Streaming Capability	3 Streams					RS485	N/A
Resolution	1080P(1920x1080)/1.3M(1280x960)/ 720P(1280x720)/D1(704x576/704x480)/ VGA(640x480)/CIF(352x288/352x240)					Alarm	2 channel In: 5mA 5VDC 1 channel Out: 300mA 12VDC
Frame Rate	Main Stream: 1080P(1~50/60fps)					Electrical	
	Sub Stream: D1(1~50/60fps)					Power Supply	DC12V, PoE (802.3af)(Class 0)
	Third Stream: 1080P(1~25/30fps)					Power Consumption	<11.5W
Bit Rate Control	CBR/VBR						
Bit Rate	H.264: 24~9472Kbps H.265: 14~5632Kbps						

Environmental

Operating Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Storage Conditions	-30° C ~ +60° C (-22° F ~ +140° F) / Less than 95% RH
Ingress Protection	IP67
Vandal Resistance	N/A

Construction

Casing	Metal
Dimensions	273.2mm×95.0mm×96.4mm (10.76"×3.74"×3.79")
Net Weight	1.07Kg (2.36lb)
Gross Weight	1.4Kg (3.09lb)

Ordering Information

Type	Part Number	Description
2MP camera	IPC-HFW5231EP-Z12	2MP IR Bullet Network Camera,WDR,PAL
	IPC-HFW5231EN-Z12	2MP IR Bullet Network Camera,WDR,NTSC
	IPC-HFW5231EP-Z12	2MP IR Bullet Network Camera,WDR,PAL
	IPC-HFW5231EN-Z12	2MP IR Bullet Network Camera,WDR,NTSC
Accessories (optional)	PFA121	Junction box
	PFA152	Pole Mount

Accessories


Optional:



PFA121
Junction box



PFA152
Pole Mount

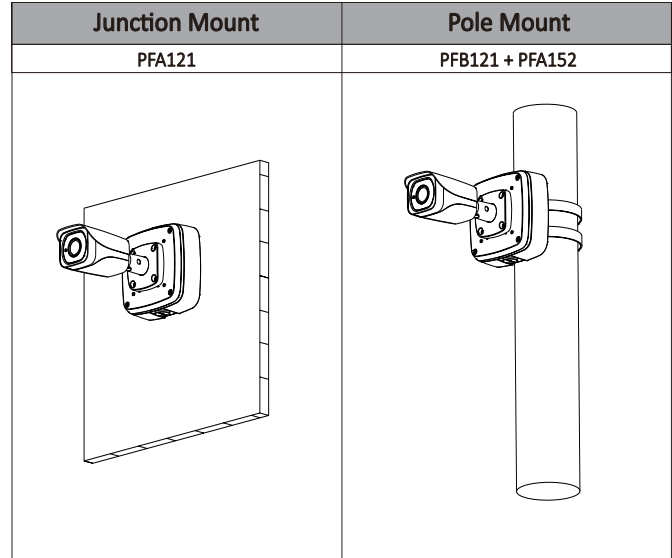

Dimensions (mm/inch)

