

i-Net Networks Floor Standing Metal Door Cabinet

42U 800mm Width



42U 600mm Width



Compliance

Meets ANSI/EIA RS-310-D
Meets IEC297-2
Meets DIN41491 part 1
Meets DIN41494

Main Structure

Front metal door & quick open side door with lock with key
Vertical cable manager (only for 800mm width cabinets)
Castor (heavy duty for 27U & above) & adjustable stopper feet
Four adjustable profile
Cage nut
Four top mounted fans
Height: 15U~47U
Width: 600mm, 800mm
Depth: 600mm, 800mm, 1,000mm
Package: Assembled/unassembled

Roof Mounted Fan



Castor



Material

Frame: Steel
Others: SPCC cold rolled steel
Thickness: Profile - 0.08" (2.0 mm), Angle - 0.06" (1.5 mm),
Side Panel - 0.03" (0.8 mm), others - 0.05" (1.2 mm)

Adjustable Stopper Feet



Loading Capacity

Static loading capacity on adjustable feet:
15U~27U Maximum up to 400kg
32U~47U Maximum up to 800kg

Lock & Key



Cage Nut



Surface Finish

Color: RAL9005 (Black), RAL7035 (Light Grey)
Degreasing, Pickling, Phosphoric, Powder coated

Ordering

CFM-42-801K-FRPD

i-Net Networks Floor Standing Cabinet Black Front & Rear Perforated Metal Door 42U 800x1000mm

42

15-15U, 18-15U, 22-22U, 27-27U, 32-32U, 37-37U, 42-42U, 45-45U, 47-47U

801K (WxD in mm)

6060-600x600mm, 6080-600x800mm, 601K-600x1000mm, 6012-600x1200mm,
8080-800x800mm, 801K-800x1000mm, 8012-800x1200mm

FRLS-Front & Rear Plain Single Door

FRPS-Front & Rear Perforated Single Door

FRPD-Front & Rear Perforated Double Door

FRPD


FPRLS-Front Perforated, Rear Plain Single Door

FPSRPD-Front Perforated Single Door & Rear Perforated Double Door

FPDRLS-Front Perforated Double Door, Rear Plain Single Door


FPDRPS-Front Perforated Double Door & Rear Perforated Single Door

i-Net Networks Floor Standing Metal Door Cabinet

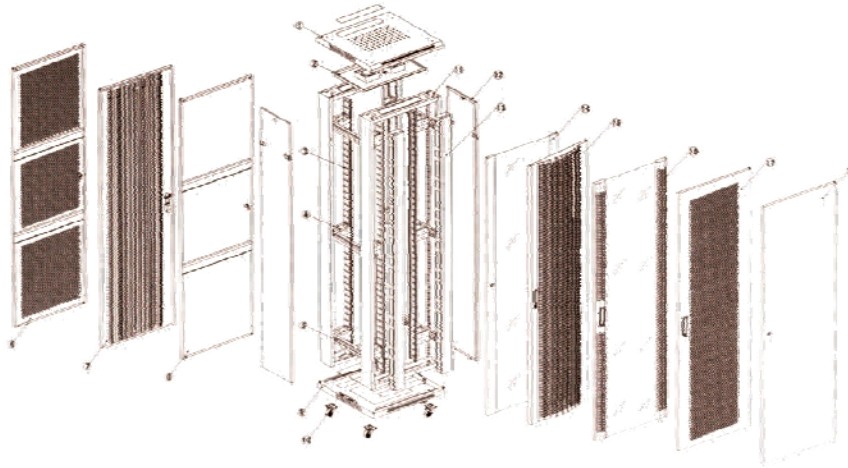

Main structure(800mm width):

- | | | | |
|--------------------------|----------------------------------|---------------------------------|--------------------------------|
| 1 Top cover | 2 Fan unit | 3 Mounting profile | 4 Spacer |
| 5 Mounting angle | 6 Rear door with hexagonal holes | 7 High-density vented rear door | 8 Steel rear door without hole |
| 9 Bottom panel | 10 Heavy duty castor | 11 Frame | 12 Side panel |
| 13 Cable management slot | 14 Front door | 15 Front door | 16 Front door |
| 17 Front door | 18 Front door | | |

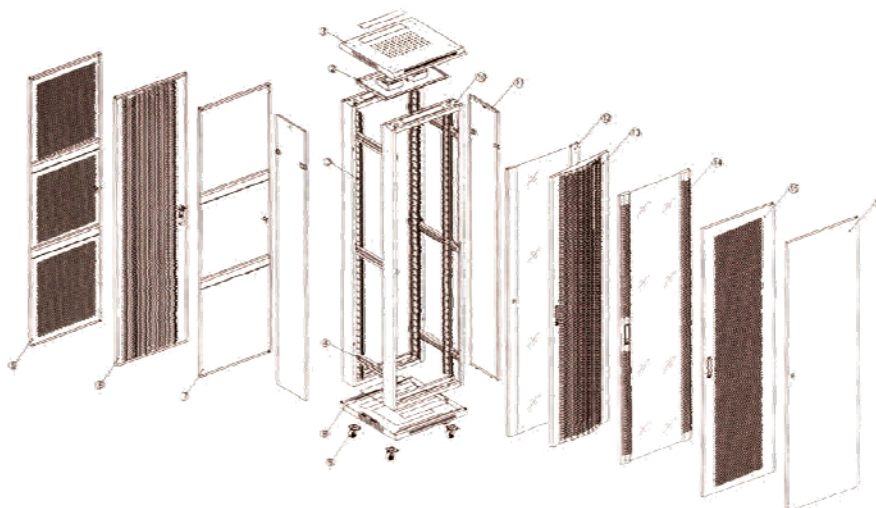

Main structure(600mm width):

- | | | | |
|-----------------------------|----------------------------|--------------------------------|------------------|
| 1 Top cover | 2 Fan unit | 3 Mounting profile | 4 Mounting angle |
| 5 door with hexagonal holes | 6 High-density vented door | 7 Steel rear door without hole | 8 Bottom panel |
| 9 Heavy duty castor | 10 Frame | 11 Side panel | 12 Front door |
| 13 Front door | 14 Front door | 15 Front door | 16 Front door |